




The image contains four technical cross-section drawings of a manhole, labeled A, B, C, and D.

- A. SEZIONE DI SCAVO (Excavation Section):** Shows a rectangular excavation with a width of 70 cm. The top edge is labeled "Taglio asfalto" (asphalt cut). The vertical wall is labeled "Scavo in sezione obbligata ristretta" (restricted excavation section).
- B. SEZIONE DI POSA E RINTERRO (Installation and Backfilling Section):** Shows the manhole structure being installed. The width is 70 cm. The backfill is labeled "Rinterro con misto granulare di cava compattato" (compacted granular quarry mix backfill). The height of the backfill is labeled "VARIABLE". The manhole structure is labeled "Tubazione in PEAD STRUTT. CORR. DE 250" (PEAD pipe, structural, corrosion-resistant, 250 DE). The bedding is labeled "Allettamento con sabbia" (bedding with sand).
- C. SEZIONE RIPRISTINO PROVVISORIO (Provisional Restoration Section):** Shows the provisional restoration. The width is 70 cm. The top layer is labeled "Tout venant bitumato" (bituminized tout venant). The middle layer is labeled "Ripristino cassettoni in misto stabilizzato a cemento rollato" (restoration with stabilized cement mix cassettes).
- D. SEZIONE RIPRISTINO DEFINITIVO (Definitive Restoration Section):** Shows the definitive restoration. The width is 70 cm. The top layer is labeled "Fresatura del manto stradale 3 cm" (3 cm road surface grinding). Below it is "Posa tappeto bituminoso 3 cm" (3 cm bituminous paving). The bottom layer is labeled "S.P. N.38" (S.P. N.38). The total width of the restoration area is 5m.

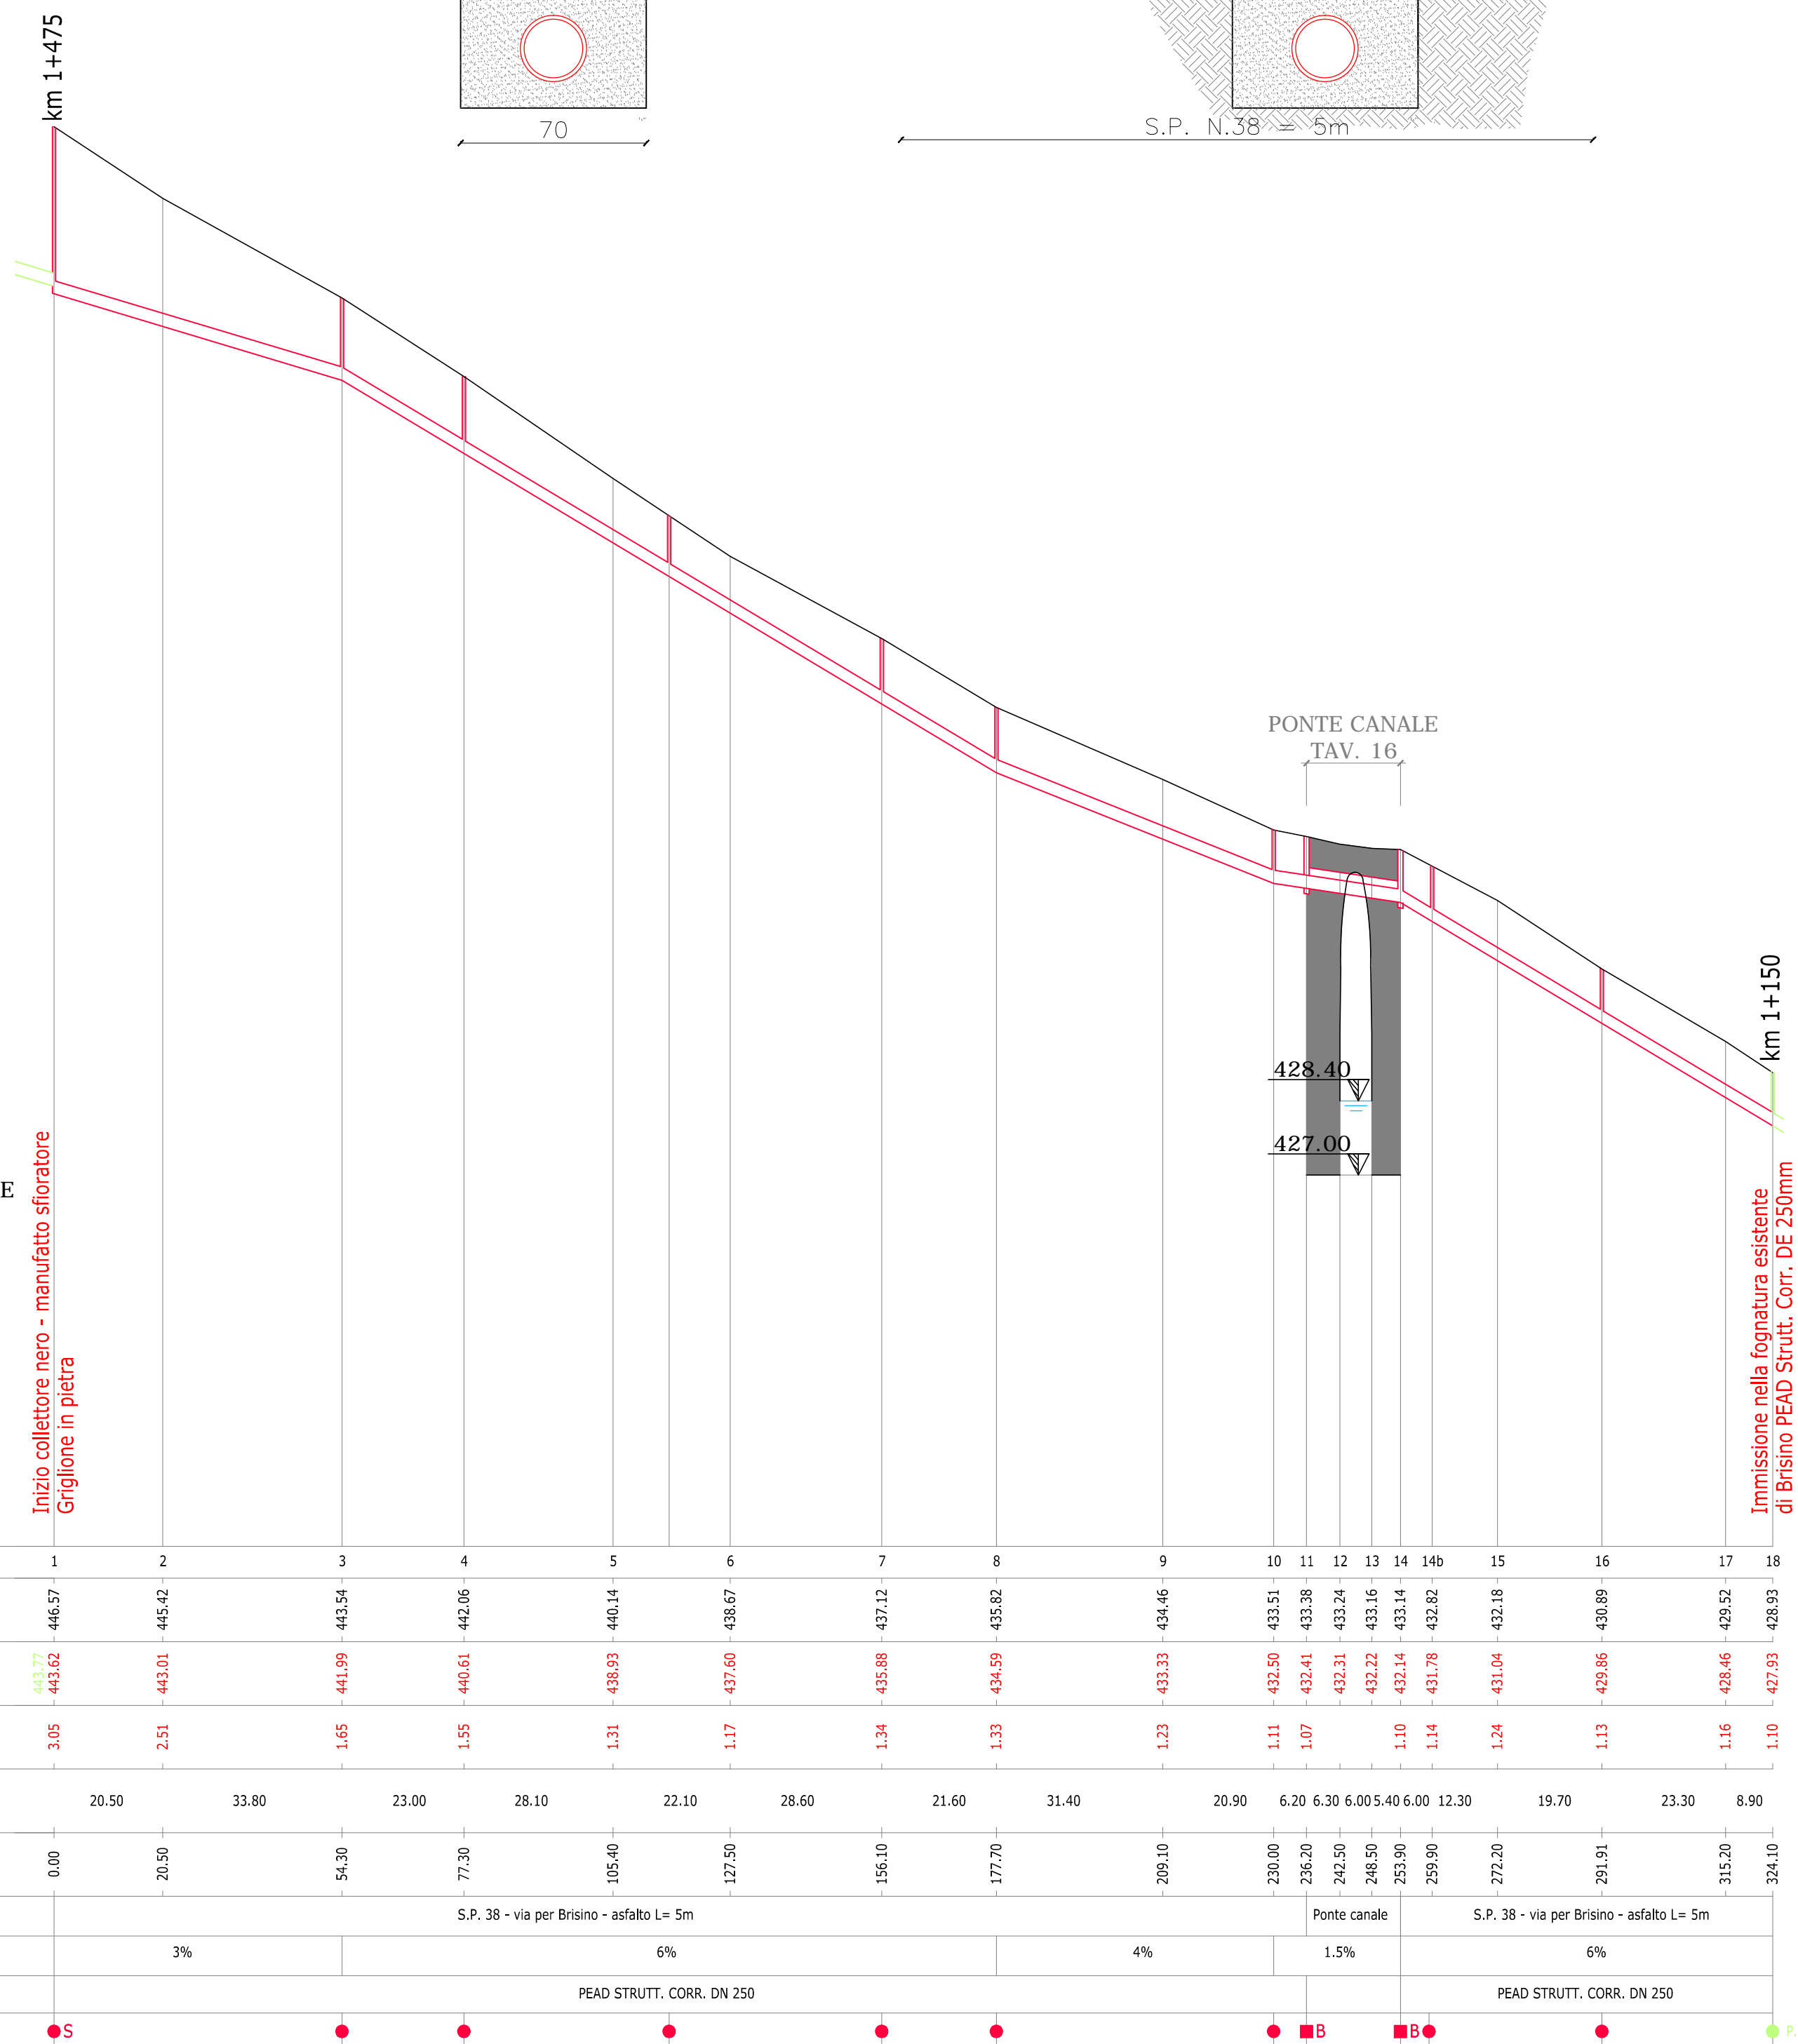

- TERRENO
- TUBO IN PROGETTO
- POZZETTO TIPO A
IN PROGETTO
- B** POZZETTO TIPO B
IN PROGETTO
- S** MANUFATTO SFIORATORE
IN PROGETTO

scala distanze 1:1000
quote 1:100

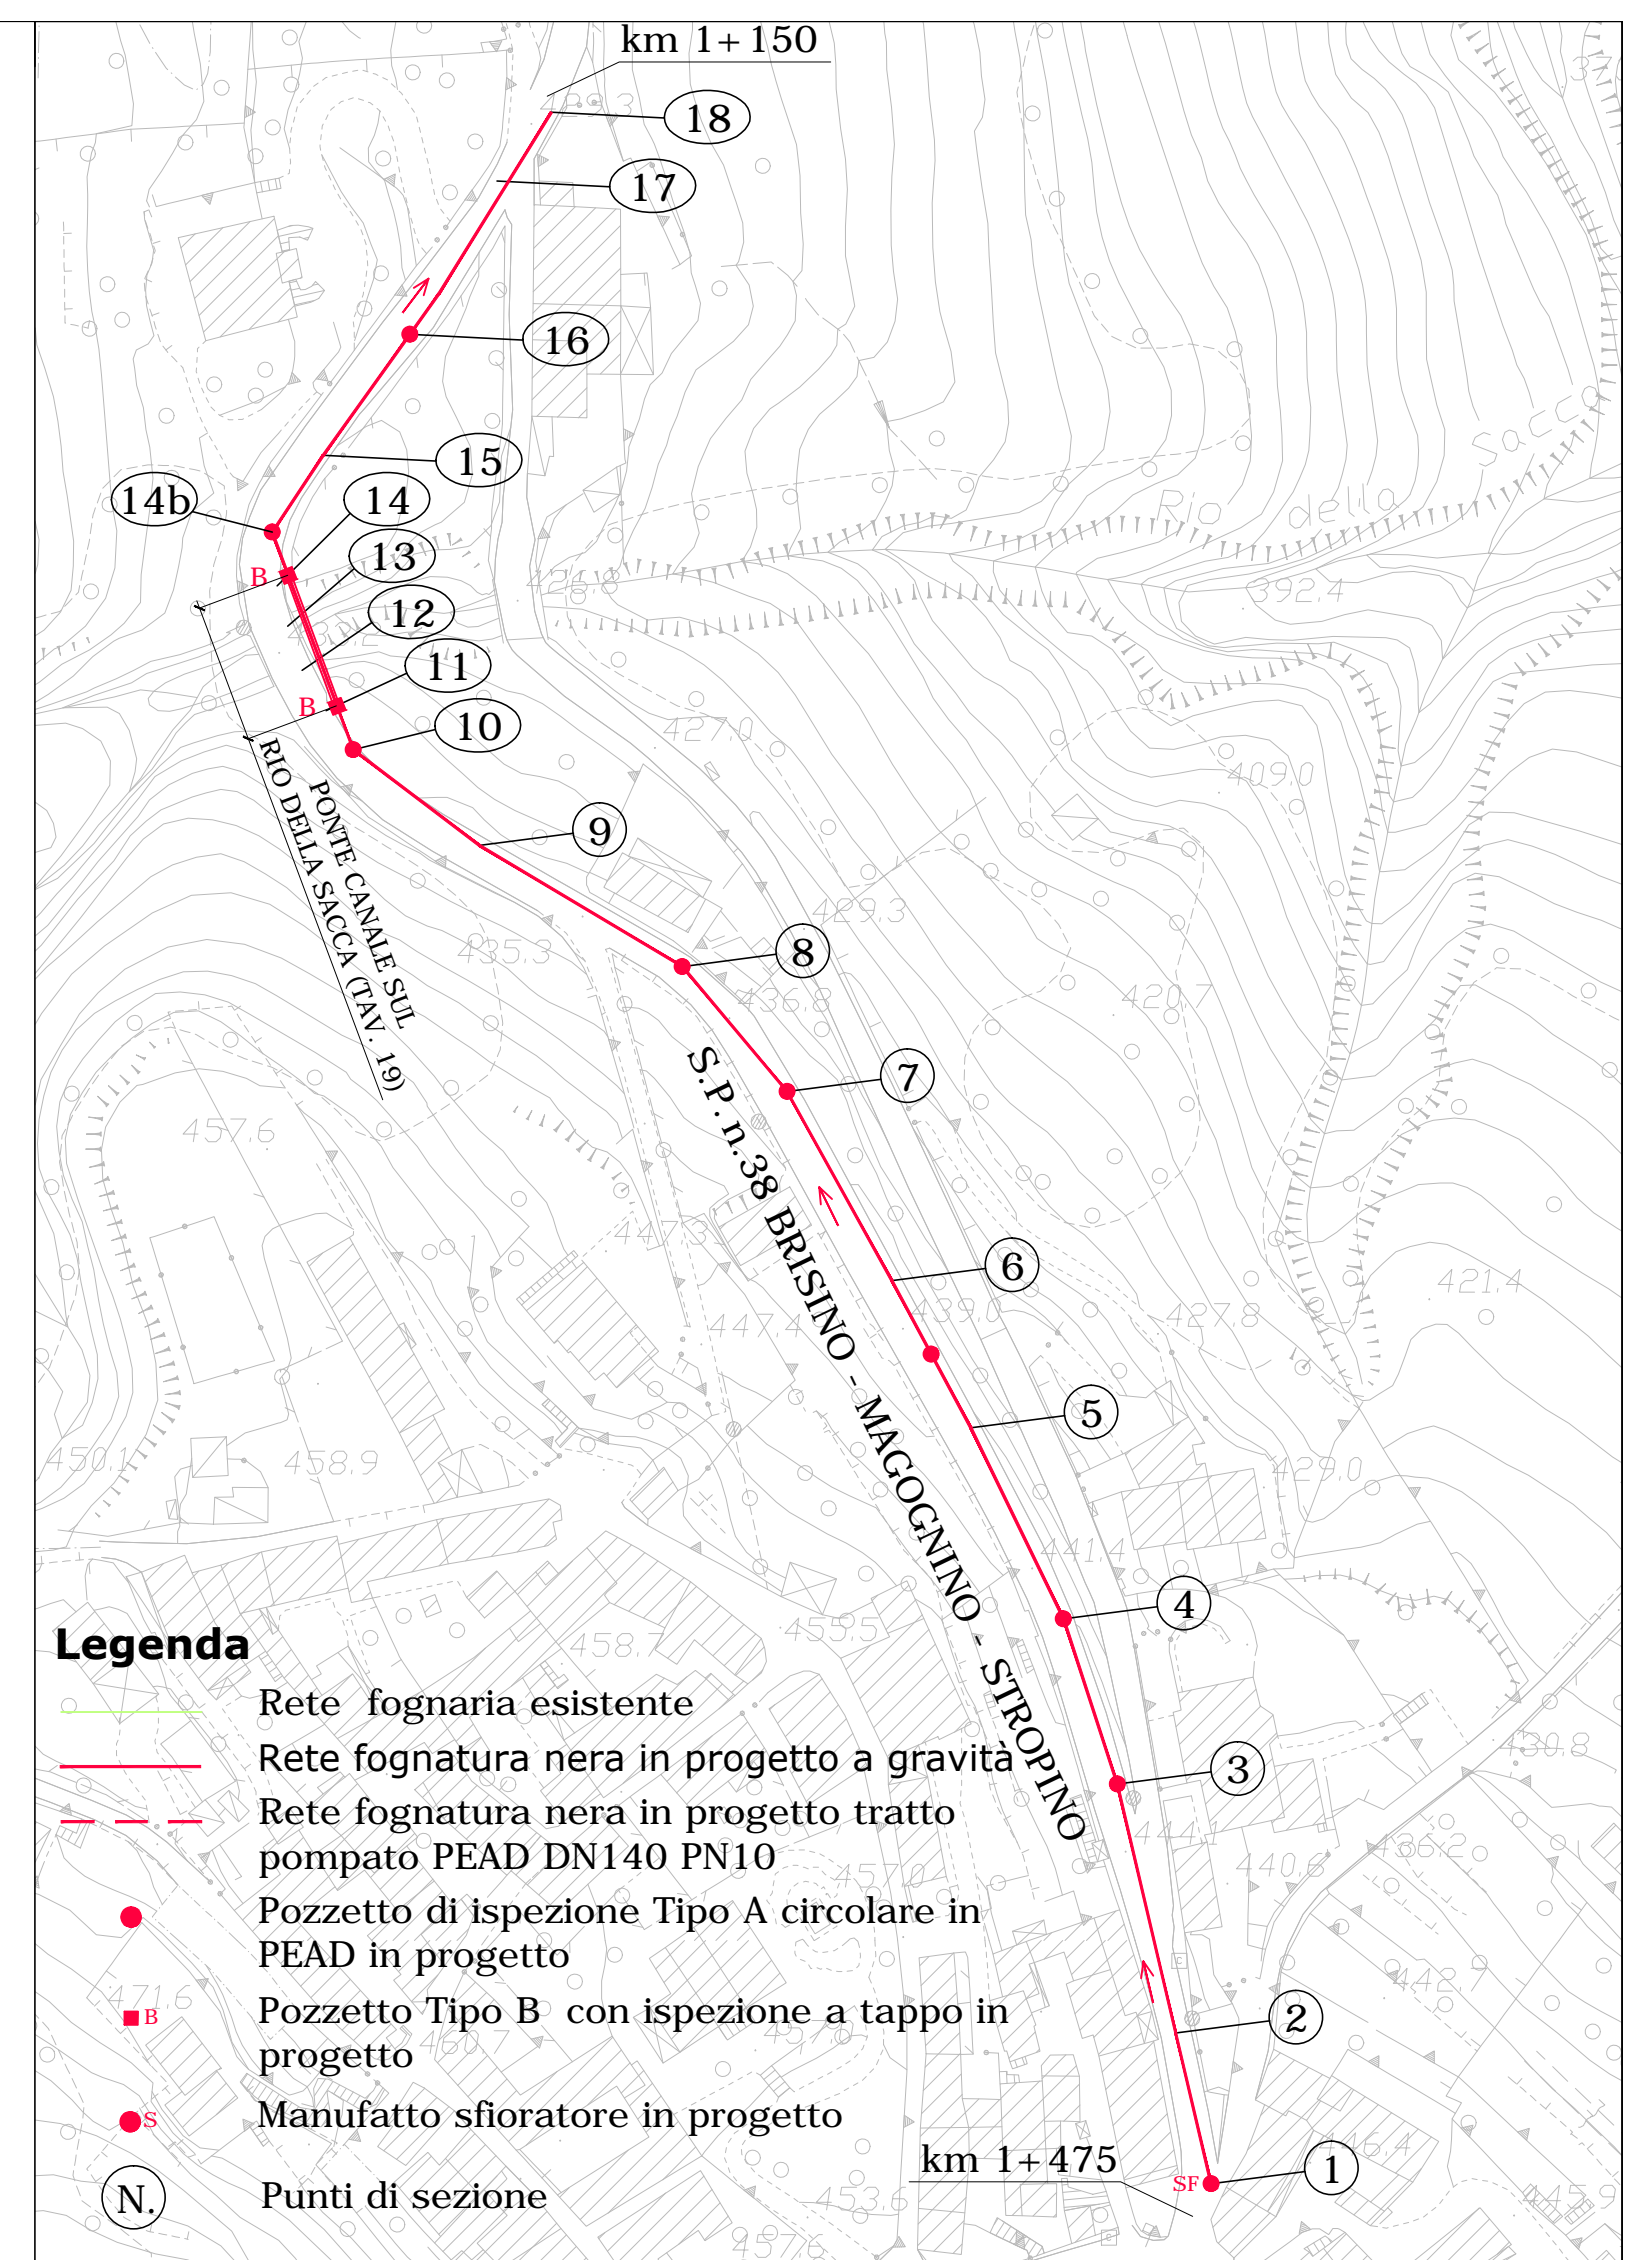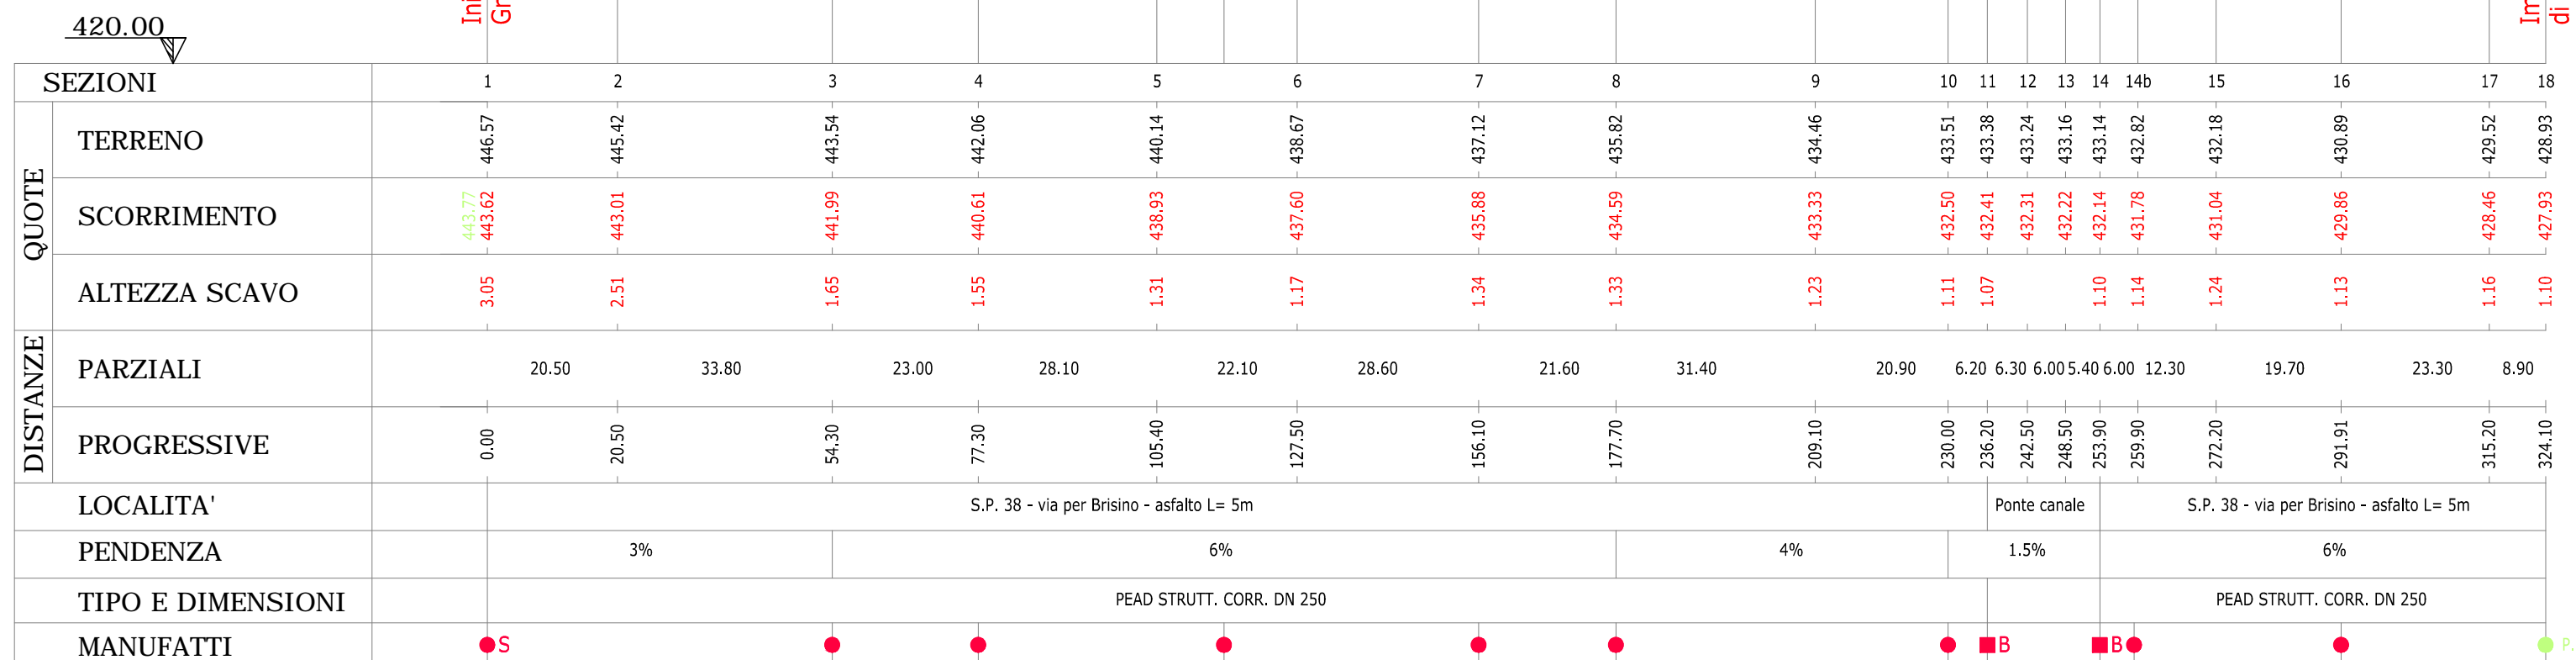

DATA Marzo 2017		GRAFICA F.B.		SCALA 1:1000	
INCARICO	CODICE	ANNO	TIPOLOGIA	ELABORATO	REVISIONE
ZF	0392	16	ES	031	D0

031.1